SIDE-POWER

Thruster systems



SP 240 TCi





MAIN FEATURES

Thrust at 21 V 240 kg/528lbs.

Power 11,4kW/16Hp

Tunnel diameter 300mm /11,8"

Propulsion system Counter rotating

Voltage 24 V (12V kit available)


Weight 70 kg / 154 lbs.

Boat size 60 - 84 foot

Current draw nom. 725 A Min. battery CCA DIN 700

This is probably the most powerful 24 V thruster on the market. It is an upgrade of our very popular SP220TC model, to better position itself in the range between the SP200TC model, and the SP285TC (48V unit). Now you get 20 extra kgs of thrust without a change in the cost and this new model also has the latest IPC* as standard.

^{*)} Intelligent Power Control is the intelligent and patented safety functions included in all Sidepower DC electric thrusters.

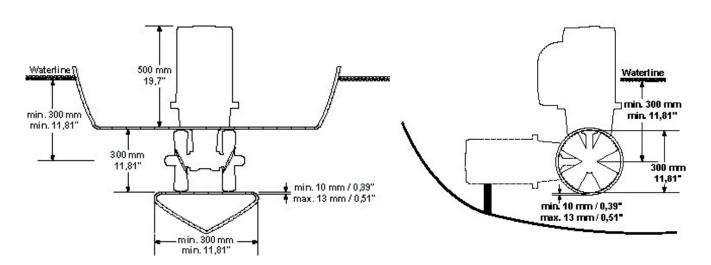



Sleipner Motor AS

P.O. Box 519 N-1612 Fredrikstad Norway

Tel: +47 69 30 00 60 Fax:+47 69 30 00 70

www.side-power.com sidepower@sleipner.no

